


Vision is
our mission®

Mast Cable 0,5m - 20m 4p Molded
Article no. 030*1**
2015 • DS03043710 R2-0

Product Data



Dimensions

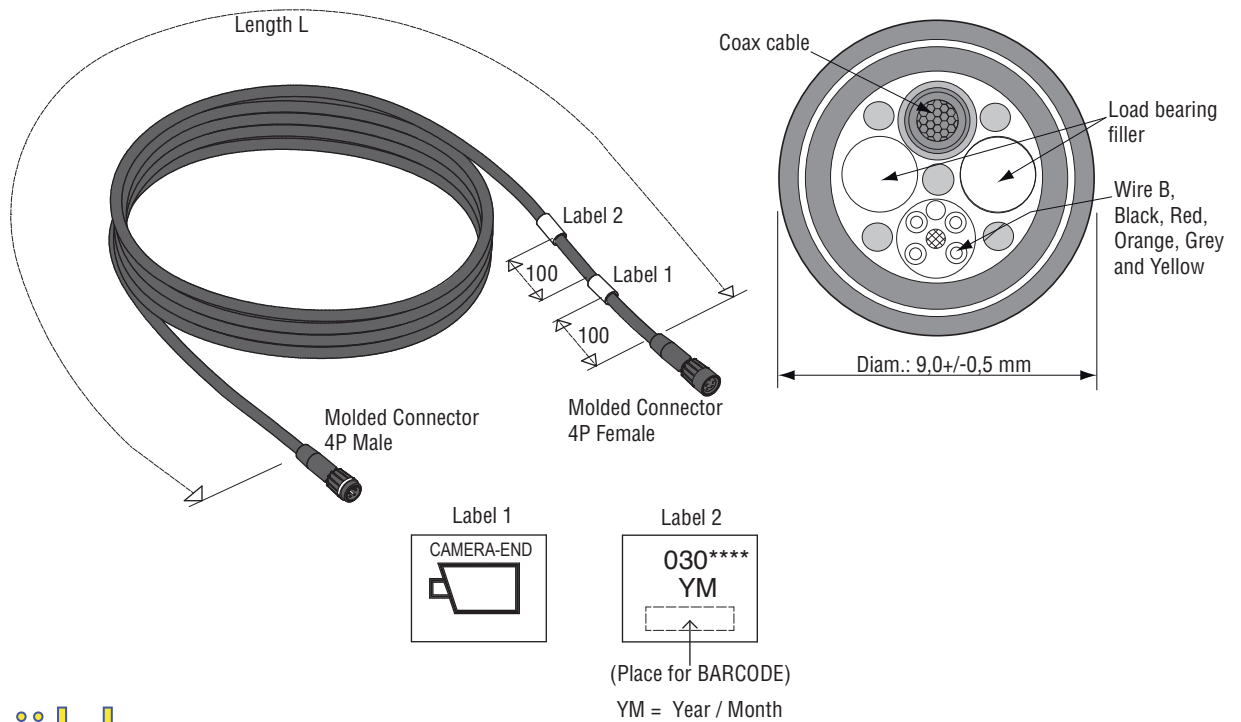

luginbühl
fahrzeug- und werkstatttechnik

ORLACO
Specialised Camera Solutions

ISO/TS 16949
ISO 9001
ISO 14001




TECHNICAL DATA

Mast Cable 0,5m - 20m 4p Molded

	Description									
Article number	0304371	0304281	0305391	0305341	0304341	0304381	0304391	0304431	0304441	
Cable length	0,5m	1m	3,2m	3,5m	5m	6m	8m	9m	10m	
Article number	0301811	0305250	0304451	0305260	0305270	0305351	0305280	0301731	0301831	
Cable length	11,2m	10,4m	12m	12,5m	13m	13,7	14,3m	15m	20m	
Connectors	Cable connector 4pins molded.									
Cable	Mast Cable, Art no 1220600, Coax; 7 x 0,10 mm SCWS, wires; 5 x AWG24 19 x 0,13mm TPC Color: Black, Red, Orange, Yellow, Grey. Jacket Black, PUR.									
Protection	IP67 according IEC 60529.									
Approvals	UV-resistant, oil resistant and Halogen free. Wires according UL Style 1589 Cable according UL Style 20963.									
Fire resistance	VW1 (UL 1581).									
Temperature range	-40°C...+85°C.									


Note: Application/service life Cable is designed for use on pulleys with a minimum diameter of 80mm and minimum width between flanges of 10mm. Guaranteed service life is 2 years. Consult Orlaco sales representative for other applications.



Front side
4p Male connector

Electrical connection

1 = coax core	Video
2 = coax shielding	Video GND
3 = red	12...30V/DC
4 = black	0V
Orange	N.C.
Yellow	N.C.
Grey	N.C.



Front side
4p Female connector

All data subject to change without notice. All dimensions are for commercial purpose only.
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.
All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

