

Vision is
our mission®

Cable 1m Uni
Article no. 0301960

Cable 2m Uni
Article no. 0301870

Cable 3m Uni
Article no. 0301890

Cable 5m Uni
Article no. 0301880

Cable 7,5m Uni
Article no. 0301910

Cable 8m Uni
Article no. 0301930

Cable 9m Uni
Article no. 0301950

Cable 11m Uni
Article no. 0301900

Cable 16m Uni
Article no. 0301920

Cable 21m Uni
Article no. 0301940


Cable 40m Uni
Article no. 0301990

2015 • DS0301870 EN R2-0

Product Data



Dimensions

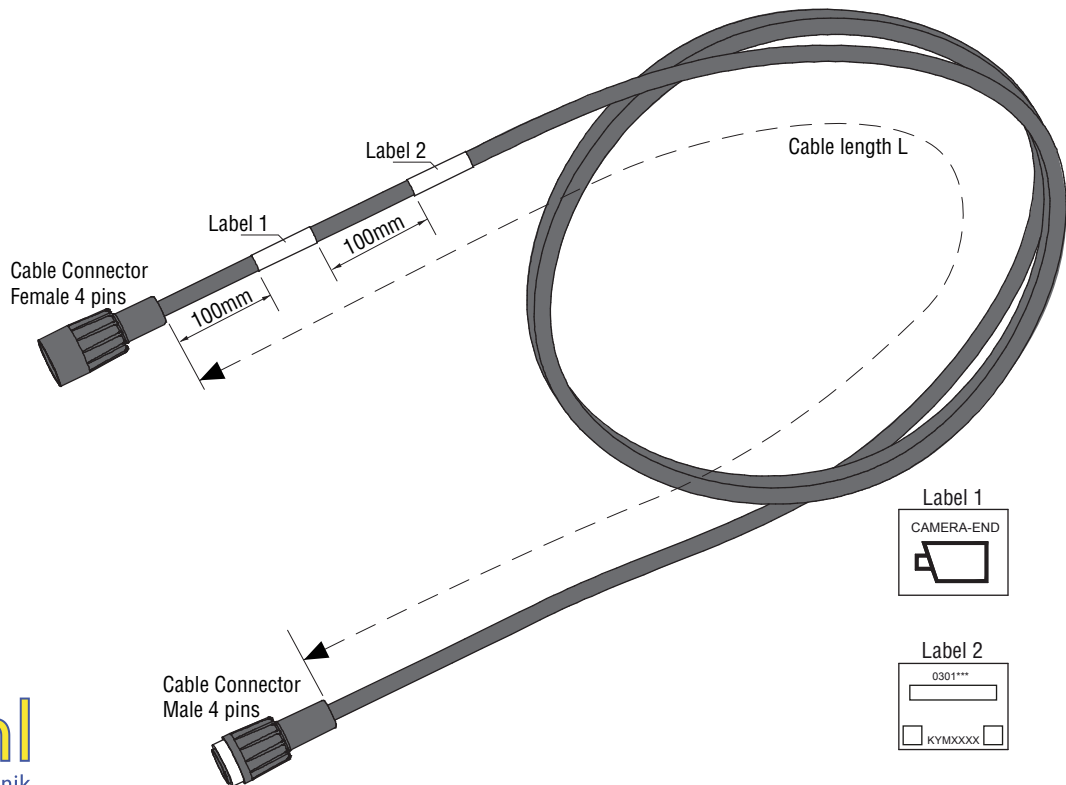

luginbühl
fahrzeug- und werkstatttechnik

ORLACO
Specialised Camera Solutions

ISO/TS 16949
ISO 9001
ISO 14001



TECHNICAL DATA

Cable *m Uni


	Description					
Cable length	1m	2m	3m	5m	7,5m	8m
Article number	0301960	0301870	0301890	0301880	0301910	0301930

Cable length	9m	11m	16m	21m	40m
Article number	0301950	0301900	0301920	0301940	0301990


Operating temperature -40°C to +85°C
Connectors Cable connector M16 4 pins, molded.
Protection IP67 according IEC 60529.
Cable Multicable 1 x coax, 2 x power, 1 x data.
Jacket Black, PVC
Bending radius 7,5 mm x diameter (static).

Electrical connection

1 = Coax core = Video signal
 2 = Coax shielding = Video GND
 3 = Red = 12V/DC
 4 = Black = 0V
 Shielding = GND



Front side
female connector



Front side
male connector

All data subject to change without notice. All dimensions are for commercial purpose only.
 The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.
 All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

