


## **Product Data**



Dimensions



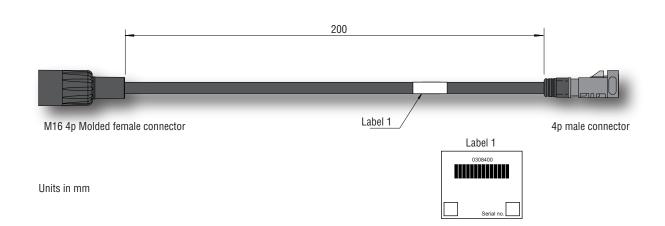



## **TECHNICAL DATA**

## Adapter cable 0,2 monitor r4M m4

**Description** 

Article number 0308400
Cable length 200mm.
Operating temperature -40°C...+85°C

Connectors M16 4 pins molded female connector + 4 pins Rosenberger male connector Z-Coded.

**Cable** 4 x tinned stranded copper wires Cu ETP1, PVC sheath.

Characteristic impedance 90 +/-15 0hm.

**Bending radius** Single: min. 20mm, multiple (<10x): min 50mm.

## **Cable connections**



M16 Female 4p molded connector Front View

2 = Blue = 24V/DC 4 = Red = 0V 1 = Green = Video 3 = Black = Video shield Shielding connected to housing



Rosenberger Male connector Z-Coded Front View 1 = Blue = 24V/DC 2 = Red = 0V 3 = Green = Video 4 = Black = Video shield

Shielding connected to housing

All data subject to change without notice. All dimensions are for commercial purpose only.

The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.

All products are manufactured in accordance with the ISO 9001 quality management system, IATF 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.





